

**Heavy Duty
Construction.**

**Portable with pallet
fork inserts to not
damage the seed
cleaner while moving.**



PALLET FORK INSERTS



AIR CHAMBER WINDOW



CAPACITIES:

- Small Seed 1.5 Tons./ HR. (57 Bu./Hr.)
- Medium Seed 4 Tons./ HR. (150 Bu./Hr.)
- Large Seed & Wheat 5.2 Tons./ HR. (200 Bu./Hr.)

Note: Capacities may vary depending on seed condition, moisture content, seed varieties, types and volumes of contaminants to be separated and percentage of foreign materials acceptable in the final product.

AIR:

Lower air, up to 4,500 CFM.

ELECTRICAL REQUIREMENTS:

Motor for Fan & Eccentric 5 Hp.

OPTIONS


- Surge Bin
- Grease Line Package
- Ladder and Spouting

TECHNICAL SPECIFICATIONS:

- Extreme Height 77"
- Extreme Width 73"
- Extreme Length 103"
- Width on Base 64"
- Length on Base 80"



BOTTOM AIR

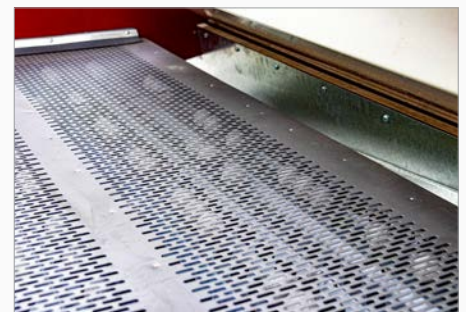

BALL TRAY SYSTEM

Flow Chart



Clean Seed



Scalping



Sifting



Flow Chart Scalp Sift

