

Clipper Debearder PRO

The Clipper Debearder Pro is a multi-purpose machine available with optional variable speed controls to handle a wide variety of jobs with ease. Originally designed to debeard barley, it has become one of the most versatile machines in the entire Clipper line.



APPLICATIONS:

- Debeard barley to improve test weight
- Clip oats to remove excess fibers, increase test weight, enhance appearance and cleaning ability
- Break up alfalfa pods, grass clusters, flax balls, crested wheat, fescues, brome, and cassia bark
- Remove mold from pepper balls
- De-awn bronco grass (in oats), dill seed, celery seed
- Hull "whitecaps" in wheat
- Polish tomato seed, and coffee beans.
- Break up Spelt Clumps



STANDARD FEATURES:

- Two Bottom Cleanout Doors
- Top Access Door
- Adjusting Motor Base & Guard
- Heavy Duty Machined Stress Proof Shaft and Bearings
- Offset Feed Inlet For Proper Rotation
- Heat Treated Beater Arms (Increased by 50% On Depth) & Fixed Shaft Rotation
- Weighted Discharge Gate to Vary Product Conditioning
- 7 Gauge Drum For Increased Life
- Heavy Duty Base With Forklift Slots.


OPTIONS:

- Various Motor Drive Packages of 50 or 60 Hertz, Single or Three Phase, TEFC or Ex-Proof
- Electronic Variable Speed with Inverter Duty Motor.
- Optional Round Heat Treated Hammer for Outside Housing for Gentle Malt Processin





CAPACITIES:

UP TO 500 BPH

Note: Capacities may vary depending on seed condition, moisture content, seed varieties, types and volumes of contaminants to be separated and the percentage of foreign material acceptable in the final product.

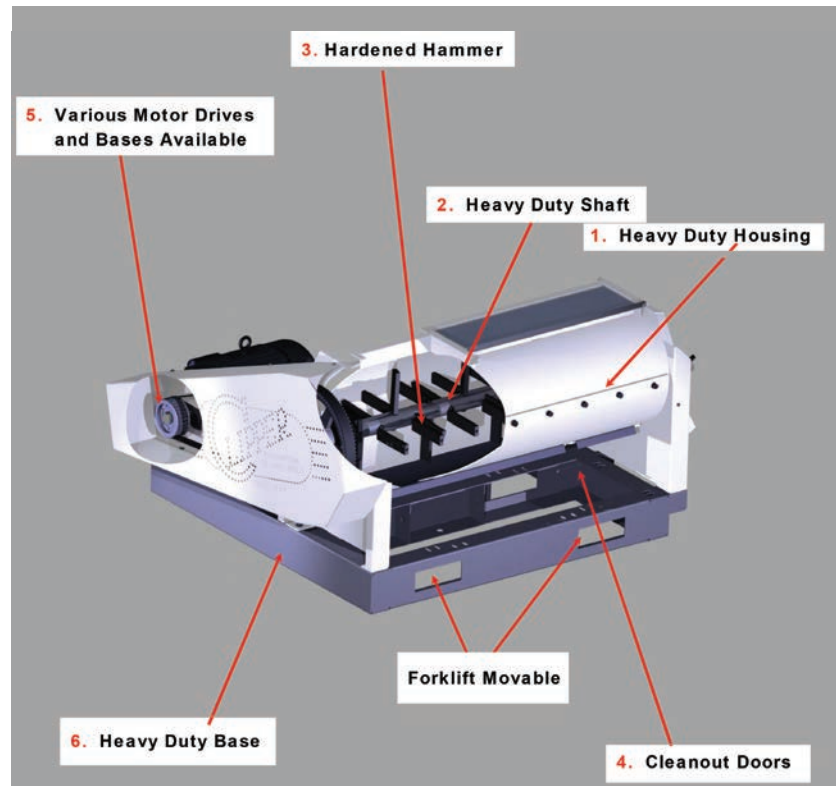

DIMENSIONS: (INCHES)

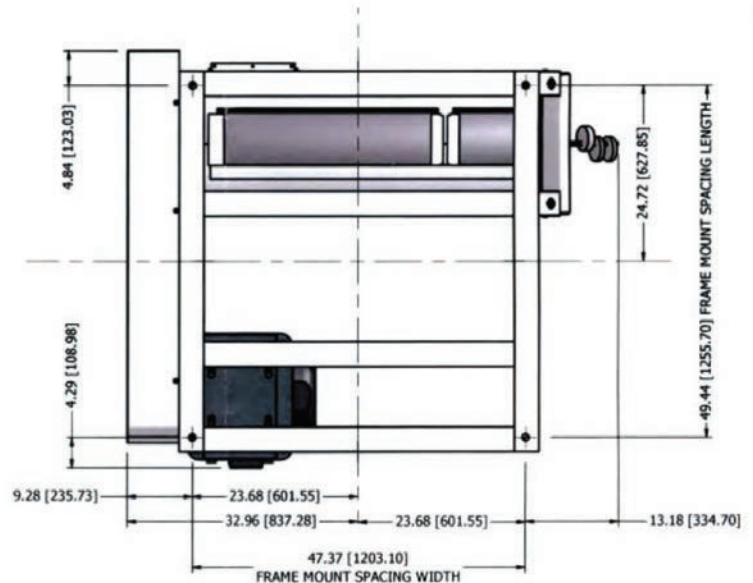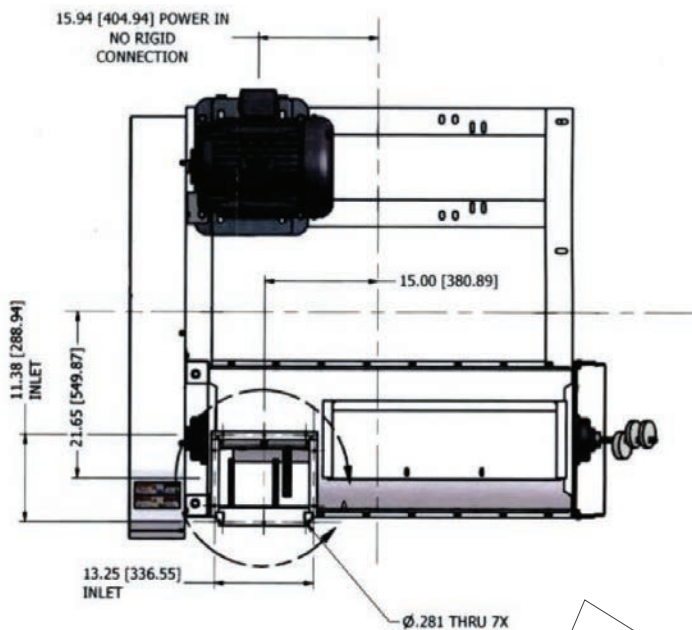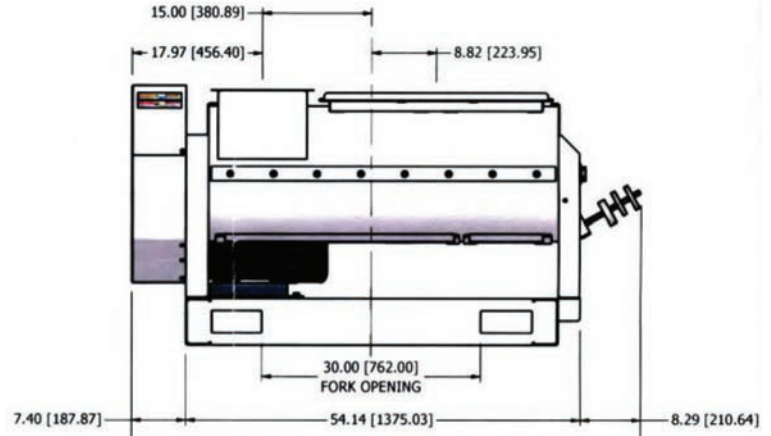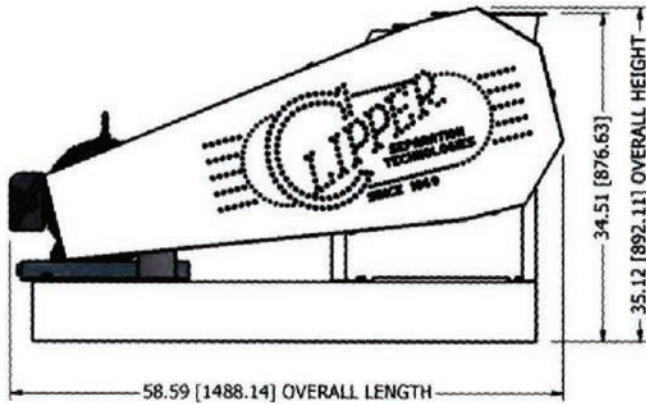

Allow a minimum of 60" from one side of machine for removal of hammer shaft. If no space is allowed hammer shaft may be extremely difficult to remove. Hammers must be removed from shaft before shaft removal.